


OPEN COUNTRY[®] A/T II



PERFORMANCE RATING – LIGHT TRUCK CONSTRUCTION

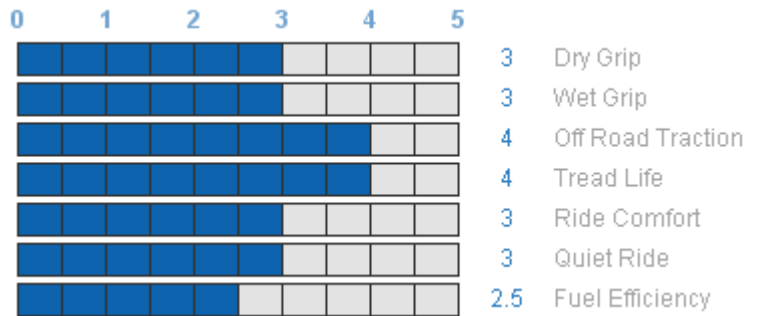

The **Open Country AT II** is a new generation of All Terrain tyre for SUVs and Utes with superior performance. The Open Country AT II offers increased tread life and excellent traction throughout the life and an aggressive tread appearance.

FEATURES

New tread compound with improved wear resistance

New casing profile

Improved tread design with groove in tread blocks and fringed block edges

Staggered and scalloped shoulder lugs

Two joint less cap plies

Large range of Light Truck construction sizes

Deeper tread depth

BENEFITS

Long tread life

More even contact pressure distribution for improved resistance to irregular wear and longer wear life

Improved off-road traction

Improved off-road traction

High speed durability and puncture resistance

High load index, puncture resistant construction for a large range of vehicles

Longer tread life

TYRE SIZE & SERVICE DESCRIPTION	TREAD DEPTH (mm)	INFLATED DIM.		LOADED DIMENSION			TEST RIM (INCH)	REVS PER KM.	APPROVED RIM WIDTH CODES (INCH)	
		O.D. (mm)	O.W. (mm)	STATIC RADIUS	STATIC WIDTH	DYNAMIC RADIUS				
Passenger Construction										
285/60R18 120S	10.8	799	292	362	318	388	8.8	410	8.0 - 10.0	
245/65R17 111S	10.0	750	248	340	270	364	7.0	437	7.0 - 8.5	
235/60R17 102H	9.9	714	240	326	262	347	7.0	459	6.5 - 8.5	
255/65R16 109H	10.1	738	260	333	283	358	7.5	445	7.0 - 9.0	
215/70R16 99S	9.9	708	221	321	241	344	6.5	463	5.5 - 7.0	
225/75R15 102S	10.0	719	223	322	243	349	6.0	456	6.0 - 7.5	
215/75R15 100S	9.9	703	216	316	235	341	6.0	467	5.5 - 7.0	
225/70R15 100T	10.0	697	228	314	249	338	6.5	470	6.0 - 7.5	
215/70R15 98H	9.9	683	221	308	241	332	6.5	480	5.5 - 7.0	
TYRE SIZE & SERVICE DESCRIPTION	TREAD DEPTH (mm)	INFLATED DIM.		LOADED DIMENSION			TEST RIM (INCH)	REVS PER KM.	APPROVED RIM WIDTH CODES (INCH)	
		O.D. (mm)	O.W. (mm)	STATIC RADIUS	STATIC WIDTH	DYNAMIC RADIUS				
Light Truck Construction										
30X9.50R15 104S	12.4	750	240	334	262	364	7.5	437	6.5 - 8.5	
31X10.50R15 109S	12.7	775	268	344	292	376	8.5	423	7.0 - 9.0	
LT235/85R16 120R	12.4	806	235	359	256	391	6.5	407	6.0 - 7.5	
LT215/85R16 115Q	12.2	772	216	346	235	375	6.0	424	5.5 - 7.0	
LT245/75R17 121S	12.5	800	248	359	270	388	7.0	410	6.5 - 8.0	
LT285/75R16 126R	13.1	834	286	370	312	405	8.0	393	7.5 - 9.0	
LT265/75R16 123R	12.7	804	267	358	291	390	7.5	408	7.0 - 8.0	
LT245/75R16 120S	12.5	774	248	347	270	376	7.0	423	6.5 - 8.0	
LT225/75R16 115Q	12.3	744	223	335	243	361	6.0	441	6.0 - 7.0	
LT235/75R15 110R	12.4	733	235	328	256	356	6.5	447	6.0 - 7.0	
LT255/70R15C 112S	12.6	739	260	330	283	359	7.5	444	7.0 - 8.0	
LT265/70R15 109S	12.7	753	272	336	296	366	8.0	435	7.0 - 8.5	
LT275/70R16 119S	12.8	792	279	354	304	384	8.0	414	7.0 - 8.5	
LT265/70R16 121R	12.7	778	272	348	296	378	8.0	421	7.0 - 8.5	
LT255/70R16 115S	12.6	764	260	343	283	371	7.5	429	6.5 - 8.5	
LT235/70R16 110R	12.4	736	240	332	262	357	7.0	446	6.5 - 7.5	
LT245/70R16 118R	12.5	750	248	337	270	364	7.0	437	6.5 - 7.0	
LT225/70R16 120S	12.3	722	228	326	249	350	6.5	455	6.0 - 7.5	
LT285/70R17 121S	12.9	832	292	372	318	404	8.5	394	7.5 - 9.0	
LT265/70R17 121S	12.7	804	272	361	296	390	8.0	408	7.0 - 8.5	
LT245/70R17 114S	12.5	776	248	350	270	377	7.0	422	6.5 - 8.0	
LT285/65R17 121S	13.4	802	292	360	318	389	8.5	409	8.0 - 10.0	
LT275/65R17 121R	12.7	796	279	358	304	386	8.0	412	7.5 - 9.5	
LT265/65R17 120R	12.7	782	272	352	296	380	8.0	419	7.5 - 9.5	